



DuraPlank

from Highland Floors




www.highlandfloors.com.au

DuraPlank

from Highland Floors

Introducing DuraPlank, our innovative vinyl flooring solution. Boasting a unique structure, it offers unparalleled dimensional stability and water-resistant properties. Available in a range of colours - DuraPlank gives you the opportunity to design and create a truly personalised space.

Attractive, cost-effective and easy to maintain.
What's not to love?

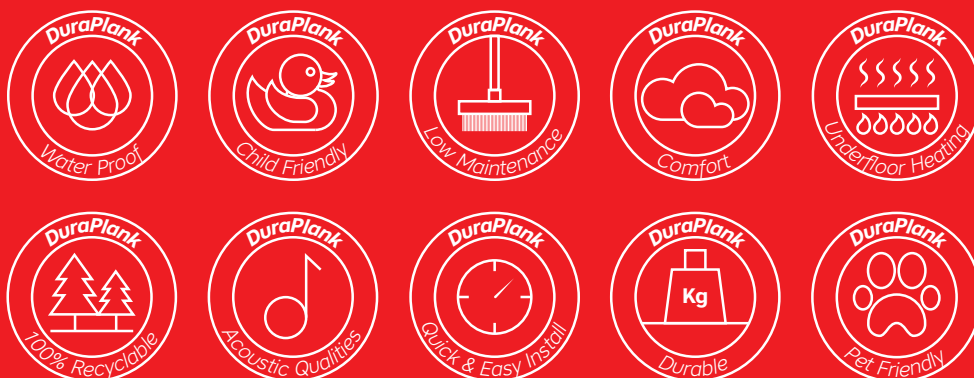

Colours to suit any space...

Duraplank offers a colour section that will complement any style, from traditional to modern and contemporary.

Planks: 1505mm x 235mm x 5mm

Sandalwood




Stonecrop




Tea Chest



Linseed

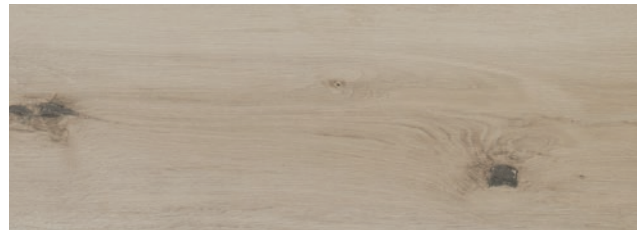


Winter Terrace

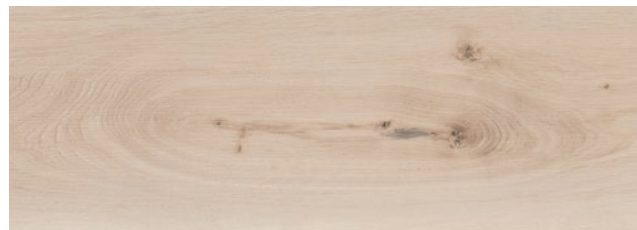


Balsa Stone



Shell Haven

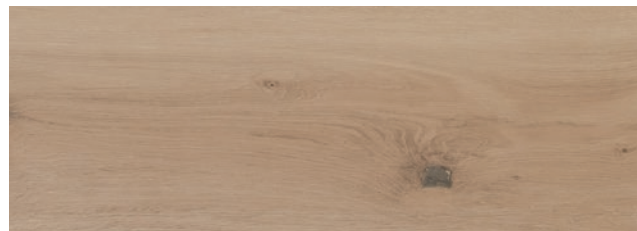

Tibetan Silk

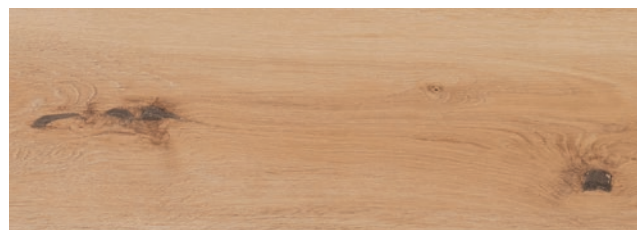



Total Dedication to **Luxury Vinyl** Manufacturing

| **Shell Haven**
1505mm x 235mm x 5mm

DuraPlank's Ecotecture® Multi-Layer design creates unparalleled dimensional stability and ensures extra sound absorption.

Produced in a world-renowned Luxury Vinyl Plank (LVP) facility, DuraPlank is a creation of unrivalled expertise in chemical engineering that traces back over 45 years.


DuraPlank maintains its attractive appearance thanks to Ecotecture® technology which offers superior durability and stain resistance.

100% recyclable, DuraPlank is committed to its contribution to environmental consideration. With extremely low VOC emissions our product makes for a healthy home or work environment for all.

www.highlandfloors.com.au

DuraPlank's Unique Multi-Layer Design & Features

- | | | |
|--|---|---|
| 1 Extra ceramic PU coating treatment (Anti-Bacterial) | 4 Extra sound absorption layer | 7 Curling prevention balance layer |
| 2 Clear design protection layers | 5 Fibreglass stabilisation layer | |
| 3 HD design print layers | 6 Stabilisation core | |

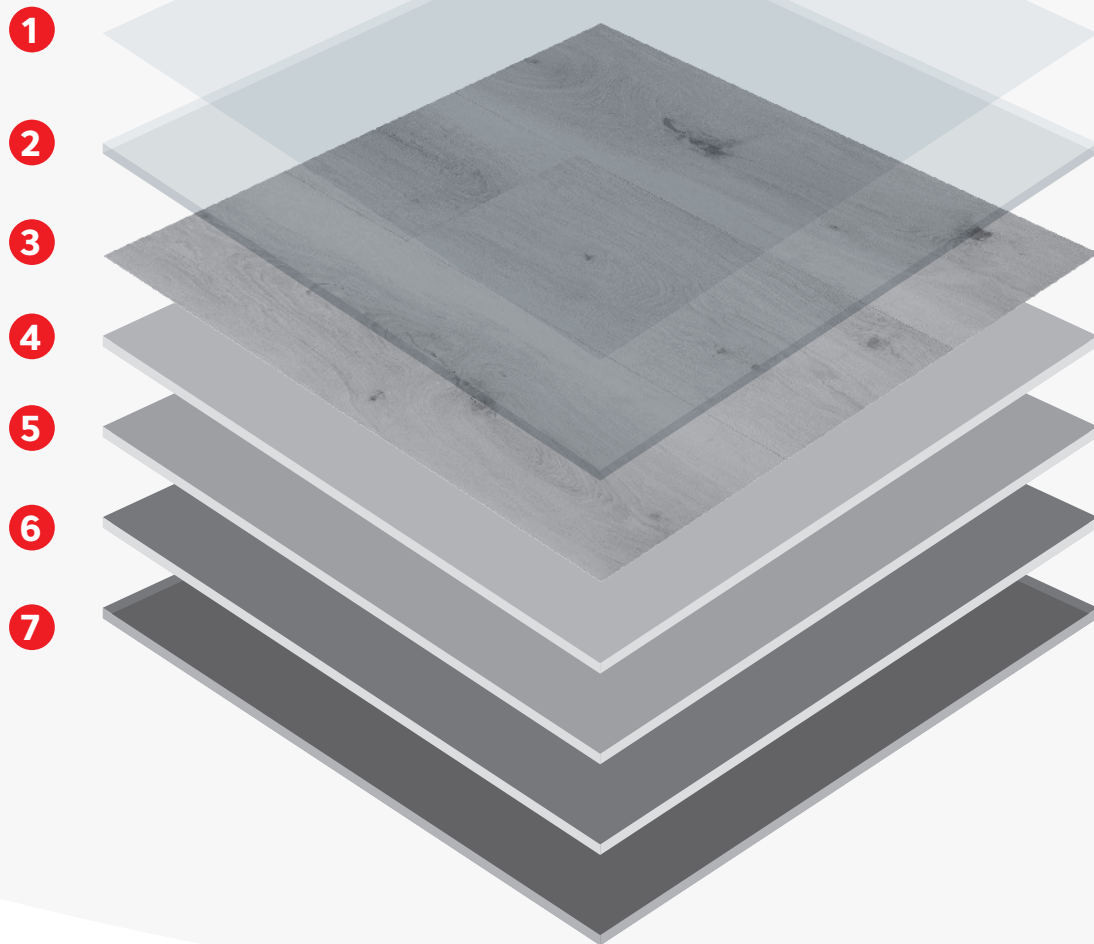

***A solution to
suit the entire
family.***



DuraPlank Technical Information

	Standard	Result
Size		1505 x 235mm
Thickness		5.0mm
Wear layer		0.7mm
Backing		PVC friction pad
Box quantity		2.12m ² / 6 plank per box
Guarantee	Commercial Domestic	10 Year Wear** 30 Year Wear**
Bevelled edge		No
Classification		Commercial Heavy Duty Domestic Extra Heavy Duty
Reaction to fire	AS/NZS ISO9239 1-2003	CRF: Smoke Value: 8.7 kW/m ² 217% min
Slip resistance	AS/NZS 4586.2013 Drv Friction AS/NZS 4586.2013 Wet Pendulum AS/NZS 4586.2013 App D	Drv Slip: D0 Wet Slip: P2 Wet Ramp: R10
Staining resistance	AS/NZS 2924.2 EN 438 ASTM F925	No visible change Class 5 Pass
Light fastness	ASTM G154-2006 ASTM F1515	NIL change in appearance <8
Abrasion resistance	AS/NZS 1859.3-2005 (Abrasion Class)	Wear Rating: AC5 (Abrasion Class 5)
Dimensional stability	ISO 2551-1990 ASTM F2199 ACCS	≤ 0.05% Pass No visible change in appearance Pass
Electrical behaviour body voltage	AS 2831-1995 (computer accommodation)	5 gigahms
Indentation - residual	EN433-1994	≤ 0.2mm
Thermal conductivity	ASTM C518-2010	R = 0.02 (m ² k/W)
Recycling		Suitable. 100% virgin material
Environmental	ASTM D5116 Green Building Council of Australia Phthalate Free	Total VOC: 0.73 mg/m ² /hr Certified Pass Yes
Installation	Must use hard set glue. All vinyl planks should be acclimatised before installation. Always refer to the installation instructions.	Roberts R280 HT or R285 FR

DuraPlank Warranties

Definitions

"Wear out" is defined as the wear-down of the surface wear layer to the extent that no pattern is any longer apparent. "Lifetime" is defined as 35 years. The warranty is fully transferable to the next owner as long as the floor is used as specified for the room type. "Commercial" installation is defined as one in which business is conducted. "Residential" installation is defined as a private domestic residence. Terra Mater (hereinafter referred to as "the Company") offers the following product warranties against product wear-out and manufacturing defects: DuraPlank 10 years Commercial DuraPlank 30 Years Residential Used in Residential premises, the Company offers a lifetime product warranty against product wear-out and manufacturing defects.

Conditions - The warranty is conditional on the following having been met:

- 1.** The product has been installed to the AS/NZS Standard 1884 Floor coverings – Resilient sheet & tile – Installation practices and the Company's instructions, both current at the time of installation.
- 2.** The subfloor meets the building standard under AS/NZS 1884 current at the time of installation and the appropriate adhesives were used that were recommended for the application.
- 3.** The product used has been correctly specified for the use of room or rooms in which it was installed.
- 4.** Maintenance is according to the Company's cleaning and maintenance instructions.

Exclusions

The following exclusions shall apply:

- 1.** Defects caused by incorrect installation and/or incorrect subfloor preparation, including insufficient attention to subfloor dampness.
- 2.** Any accidental damage such as fire, flood or lack of barrier matting at any external entrance and the like.
- 3.** Any claim resulting from a manufacturing defect, which is not notified to the Company within six (6) months of installation.
- 4.** Damage caused due to improper use or improper maintenance.
- 5.** Damage caused by stains, excessive heat, cuts, scratches and/or other abuses that the floor may be subjected to during usage not determined as fair wear and tear.
- 6.** Fading and discoloration.
- 7.** Damage caused by indentation and abrasion: e.g. unprotected castor wheels, furniture legs, high and spiked heel footwear.
- 8.** High temperature areas where the mandatory use of a high-temperature 2-part adhesive was not used as defined in the Company's installation instructions.
- 9.** Exceptional traffic and/or high temperature areas where the mandatory use high-temperature 2-part adhesive was not used as defined in the installation instructions.

Claims

- 1.** All claims must be submitted to the retailer from which you bought the product. The retailer will liaise with the Company on your behalf. If the retailer is no longer in business then you should make your claim directly to the Company in writing, to the address at the foot of this document.
- 2.** Claims must be made as soon as they become apparent.
- 3.** The Company will require information on the claim, including a copy of the invoice, product detail, installation and subfloor information, samples removed from the installation, photographs and a report of the defect.
- 4.** Once a claim is raised the Company will carry out an investigation and satisfying themselves that the problem is their responsibility, will replace any defective material at no charge with the same or similar product. If requested you must send these materials to the Company at your cost.
- 5.** The Company will also reimburse a proportionate cost towards labour, uplift and re-installation, providing costs are agreed between the parties before work commences.

This warranty is in addition to and does not affect your statutory rights. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law/NZ Consumer Guarantees Act 1993. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

DuraPlank

from Highland Floors

